




SERVER RACK & ACCESSORIES



FREE STANDING RACKS - FULLY ASSEMBLED



Rear Split Mesh Door + Door Lock



Multiple cable entry glands at the top



Ample cable entry glands at the bottom



Nylon bush lining on all cable entry glands to protect from wear and tear




Earth straps on front and rear doors



Pre-installed lockable castors and stabilising feet



Included roof fan kit



Earth bolt on side panel



Split side panel

HIGHLIGHTS

- Premium Server Rack for installing rack equipment in IT & Audio Visual Environments
- Available in various sizes from 9RU to 48RU rack space 1000kg stationary load capacity.
- Ships fully assembled for quick installation.
- Includes lockable front, rear doors along with the split, lockable side panel.
- Confirm to Standard ANSI/EIA RS-310-D, IEC297-2, DIN4191; PART1, DIN4194; PAT7, GB/T3047M 2-92
- Warranty: 25 Years* See T&Cs





FREE STANDING RACKS - FULLY ASSEMBLED

RACK SIZES

Rack Part No.	Rack Height	Accessories Inside	Weight (kg)	Dimensions (mm) Width x Depth x Height	L Brackets Rail Set	Top and Bottom Cutouts	Features			
							Earth Leads	Cable Access top and bottom	Split Side Panels	Glazed safety glass door 5mm
CBN-9RU-64FS	9RU	1 x Shelves, 1 x 6 Way PDU, L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts, 4 x Castors	20	600 X 450 X 577	2	1		✓	✓	✓
CBN-9RU-65FS	9RU		27	600 X 550 X 577	2	1		✓	✓	✓
CBN-9RU-66SFS	9RU		26	600 X 600 X 577	2	1		✓	✓	✓
CBN-12RU-64FS	12RU		20	600 X 450 X 710	2	1		✓	✓	✓
CBN-12RU-65FS	12RU		24	600 X 550 X 710	2	1		✓	✓	✓
CBN-12RU-66SFS	12RU		29	600 X 600 X 710	2	1		✓	✓	✓
CBN-15RU-66SFS	15RU		33	600 X 600 X 850	2	1		✓	✓	✓
CBN-18RU-64FS	12RU	2 x Shelves, 1 x 2 Way Fan Kit, 1 x 8 Way PDU, L-shaped rails, 40 x M6 Cage Nuts, 40 x M6 Washers, 40 x M6 Bolts, 4 x Castors, 4 x Stabilising feet, 1 x Earth Bolt	33.5	600 X 450 X 987	2	1	✓	✓	✓	✓
CBN-18RU-65FS	15RU		38	600 X 550 X 987	2	1	✓	✓	✓	✓
CBN-18RU-66FS	18RU		40	600 X 600 X 987	2	1	✓	✓	✓	✓
CBN-18RU-68FS	18RU		45	600 X 800 X 987	2	1	✓	✓	✓	✓
CBN-18RU-61FS	18RU		53	600 X 1000 X 987	2	1	✓	✓	✓	✓
CBN-22RU-66FS	22RU		57	600 X 600 X 1165	2	1	✓	✓	✓	✓
CBN-22RU-68FS	22RU		65	600 X 800 X 1165	2	1	✓	✓	✓	✓
CBN-22RU-61FS	22RU		73	600 X 1000 X 1165	2	1	✓	✓	✓	✓
CBN-27RU-66FS	27RU		65	600 X 600 X 1387	2	1	✓	✓	✓	✓
CBN-27RU-68FS	27RU		75	600 X 800 X 1387	2	1	✓	✓	✓	✓
CBN-27RU-61FS	27RU		82	600 X 1000 X 1609	2	1	✓	✓	✓	✓
CBN-27RU-88FS	27RU		85	800 X 800 X 1387	3	1	✓	✓	✓	✓
CBN-32RU-66FS	32RU		77	600 X 600 X 1609	3	1	✓	✓	✓	✓
CBN-32RU-68FS	32RU		85	600 X 800 X 1609	3	1	✓	✓	✓	✓
CBN-32RU-61FS	32RU		92	600 X 1000 X 1609	3	1	✓	✓	✓	✓
CBN-37RU-66FS	37RU		82	600 X 600 X 1832	3	1	✓	✓	✓	✓
CBN-37RU-68FS	37RU		87	600 X 800 X 1832	3	1	✓	✓	✓	✓
CBN-37RU-61FS	37RU		92	600 X 1000 X 1832	3	1	✓	✓	✓	✓
CBN-42RU-66FS	42RU		90	600 X 600 X 2054	3	1	✓	✓	✓	✓
CBN-42RU-68FS	42RU		105	600 X 800 X 2054	3	1	✓	✓	✓	✓
CBN-42RU-61FS	42RU		122	600 X 1000 X 2054	3	1	✓	✓	✓	✓
CBN-42RU-612FS	42RU		132	600 X 1200 X 2054	3	1	✓	✓	✓	✓
CBN-45RU-66FS	45RU		97	600 X 600 X 2188	3	1	✓	✓	✓	✓
CBN-45RU-68FS	45RU		112	600 X 800 X 2188	3	1	✓	✓	✓	✓
CBN-45RU-61FS	45RU		123	600 X 1000 X 2188	3	1	✓	✓	✓	✓
CBN-45RU-612FS	45RU		138	600 X 1200 X 2188	3	1	✓	✓	✓	✓
CBN-42RU-88FS	42RU	3 x Shelves, 1 x 4 Way Fan Kit, 1 x 8 Way PDU, L-shaped rails, 40 x M6 Cage Nuts, 40 x M6 Washers, 40 x M6 Bolts, Vertical Cable Management Rails, 4 x Castors, 4 x Stabilising feet, 1 x Earth Bolt	141	800 X 800 X 2054	3	1	✓	✓	✓	✓
CBN-42RU-81FS	42RU		148	800 X 1000 X 2054	3	1	✓	✓	✓	✓
CBN-42RU-812FS	42RU		180	800 X 1200 X 2054	3	1	✓	✓	✓	✓
CBN-45RU-88FS	45RU		155	800 X 800 X 2188	3	1	✓	✓	✓	✓
CBN-45RU-81FS	45RU		160	800 X 1000 X 2188	3	1	✓	✓	✓	✓
CBN-45RU-812FS	45RU		190	800 X 1200 X 2188	3	1	✓	✓	✓	✓
CBN-48RU-81FS	48RU		172	800 X 1000 X 2258	3	1	✓	✓	✓	✓
CBN-48RU-812FS	48RU		200	800 X 1200 X 2258	3	1	✓	✓	✓	✓

PRODUCT INCLUDES

6/8 Way Horizontal PDU: (8) 3 Pin AUS GPO Output; (1) 3 Pin Aus Plug Input, 10A, 240V	× 1
2/4 Way Roof Mount Fan	× 1
Fixed Shelves (Subject to Rack)	× 3
Lockable Castors	× 4
Stabilizing Feet	× 4
Adjustable 19inch Mounting Rails	× 4
Keys	× 2

Heavy Duty M6 Cage Nuts, Washer & Screw	× 40
Split Perforated Mesh Door	× 1
Front Glass Door	× 1
Split Lockable Side Panels	× 2
Grounding Lugs - Front Door, Rear Door, Side Panels	
Earth Straps - Front Door & Rear Door	
L Brackets	× 2



1RU THREE-WAY VERTICAL CABLE HANGER

Part No.: CR-3VCH



FEATURES

- 64mm x 102mm Three-Way Vertical Cable Hanger
- Right-angled bracket with 2 sets of mounting holes for flexible positioning
- Sturdy steel construction
- Warranty: 25 Years* See T&Cs

Available in: 1RU

1RU CABLE RINGS

Part No.: CR-1UXX



FEATURES

- 1RU Bracket can be mounted to any standard rack post
- Flexible opening
- Sturdy steel construction
- Warranty: 25 Years* See T&Cs

Available in (mm): 38 x 100, 63 x 100 & 63 x 150

HORIZONTAL RING CABLE MANAGEMENT RAIL

Part No.: CMR-01-4R | CMR-01-5R



FEATURES

- Helps eliminate cable stress.
- Organises cables within enclosure or open rack.
- Required mounting hardware included.
- Warranty: 25 Years* See T&Cs

Available in: 4 rings & 5 rings

HORIZONTAL SLOT CABLE MANAGEMENT RAIL

Part No.: CMR-01-12 | CMR-1RU-24 | CMR-2RU-24



FEATURES

- Helps eliminate cable stress.
- Organises cables within enclosure or open rack.
- Required mounting hardware included.
- Warranty: 25 Years* See T&Cs

Available in: 1RU 12 slots, 1RU 24 slots & 2RU 24 slots



SERVER CABINET SHELVES

Part No.: SLV-012P-XXX / SLV-02-XXX



FEATURES

- Fully Compatible with all 19 inch server cabinet
- Comes included with mounting cage
- Heavy load capacity
- Warranty: 25 Years* See T&Cs

Available Depth:
150mm / 250mm / 300mm / 350mm / 450mm

UNIVERSAL FIXED SHELF

Part No.: SLV-01-1000



FEATURES

- Adjustable for cabinets from 600mm to 1000mm depth
- Perforated to allow optimum air circulation
- 50kg distributed load capacity in completely open state
- Made from 1.5mm powder coated zinc annealed steel
- Included all mounted hardware
- 50kg load capacity
- Warranty: 25 Years* See T&Cs

Available Depth: 600mm / 1000mm

SLIDING KEYBOARD SHELF WITH MOUSE TRAY

Part No.: SLV-02-KB



FEATURES

- Distributed loading capacity of 50kg
- Suitable for use with most standard 19-inch cabinets
- 50kg load capacity
- Warranty: 25 Years* See T&Cs

Available Depth: 2RU

LOCKABLE RACK MOUNTABLE DRAWER

Part No.: SLV-XX-RD



FEATURES

- Comes with lock with set of keys to keep your valuable equipment safe
- Solid steel construction
- Warranty: 25 Years* See T&Cs

Available Depth: 1RU / 2RU

HORIZONTAL GROUNDING BAR

Part No.: SGB-H01



FEATURES

- Protects your rack-mounted equipment from electrical surges
- Installs easily into any standard server rack or cabinet
- Grounds up to ten individual devices
- Warranty: 25 Years* See T&Cs

Grounds up to 10 Devices

LACING BARS

Part No.: LB-PRE | LB | LB-2 | LB-4 | LB-6




FEATURES

- Perfect solution for managing cables inside your rack
- Different sizes to suit all types of requirements
- Warranty: 25 Years* See T&Cs

Available Depth: 1RU / 2RU

VERTICAL MANAGEMENT SYSTEM

Part No.: CT-100-XXRU | CT-150-XXRU | CT-300-XXRU

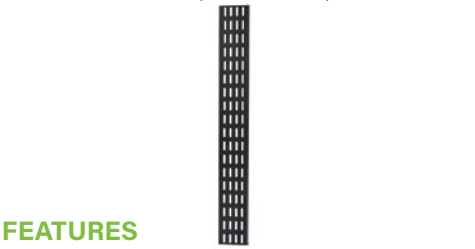

FEATURES

- Provides extra cable management
- Space saving method to install the vertical PDU in the racks
- Traceable system for the cables
- Black powder coated

Available Depth: 18RU / 22RU / 27RU / 37RU / 42RU / 45RU



1RU RACK MOUNT FAN KIT WITH THERMOSTAT

Part No.: RMF4PTK | RMF2PTK



FEATURES

- Finger guards installed on the frame
- Noise reduction fans.
- Comes with a thermostat to monitor and control temperatures
- 3 Pin Aus Plug Input
- ¥ Ideal for improving air circulation inside the rack
- Warranty: 25 Years* See T&Cs

Available in: 2 Way & 4 Way

1RU RACK MOUNT FAN KIT

Part No.: RMF-01-02 | RMF-01-04



FEATURES

- Finger guard installed on the frame
- Noise reduction fans
- 3 Pin Aus Pluf input
- Ideal for improving air circulation inside the rack
- Warranty: 3 Years* See T&Cs

Available in: 2 & 4 Way Units

2 WAY RACK MOUNT FAN KIT

Part No.: RF-02



FEATURES

- Finger guard installed on the frame
- Noise reduction fans
- 3 Pin Aus Pluf input
- Ideal for improving air circulation inside the rack
- Warranty: 3 Years* See T&Cs

Available in: 2 Way Units



WALL MOUNT BRACKETS

Part No.: PP2UWM | PP4UWM | PP8UWM




FEATURES

- Sturdy cold rolled steel construction
- Hinged side panel for easy equipment access
- 10 kg weight capacity
- Warranty: 25 Years* See T&Cs

Available in: 2RU, 4RU or 8RU

BLANKING PANELS

Part No.: BP-XX | BP-XXV

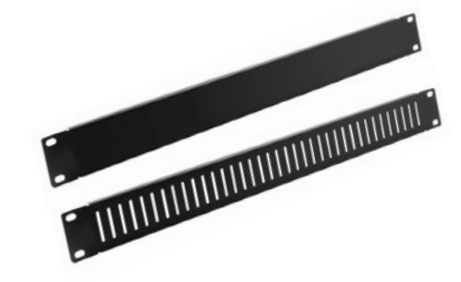

FEATURES

- 1.2mm Cold Rolled steel
- Powder coated surface finish
- Fills empty space in your rack for security, airflow control and aesthetic value
- Warranty: 25 Years* See T&Cs

Available in: 1RU, 2RU, 3RU, 4RU, Regular or Vented

TOOLLESS BLANKING PANELS

Part No.: TLBP-XX-SM | TLBP-XX-VM



FEATURES

- 1.2mm Cold Rolled steel
- Powder coated surface finish
- Fills empty space in your rack for security, airflow control and aesthetic value
- Warranty: 25 Years* See T&Cs

Available in: 1RU, 2RU, 3RU, 4RU, Regular or Vented

1RU 19" BRUSH PANEL

Part No.: CMR-1U-BP



FEATURES

- Easy cable feed through
- 1.5 Steel construction
- Warranty: 25 Years* See T&Cs

Available in: 1RU, 19"

SET OF 4 HEAVY DUTY CASTOR WHEELS WITH BREAK

Part No.: CASW04



FEATURES

- Quantity: 4x Castors with brake
- Precision ball bearing on each wheel
- Heavy duty design
- Lockable brakes
- Swivel wheels for easy maneuverability
- Warranty: 25 Years* See T&Cs

Includes: 4 Castor & screw set

M6 BOLT & CAGE NUTS

Part No.: CB-1P-BK-50 | CB-1P-BK-100



FEATURES

- Consists of Screw, Washer and Nuts
- Black Colour
- Heavy Duty Construction
- Warranty: 25 Years* See T&Cs

Available in: 50 & 100 Pack




SERVER CABINET DOOR OPTIONS

AVAILABLE IN 600MM & 800MM WIDE OPTIONS


Various different types of door options are available for you to customise your server rack. Available in single mesh door, glass door, dual barn mesh door, single perspex door, and solid metal door.

Available in: 12RU, 15RU, 18RU, 22RU, 27RU, 32RU, 37RU, 42RU, 45RU, 48RU

Available in: 600 & 800mm Width

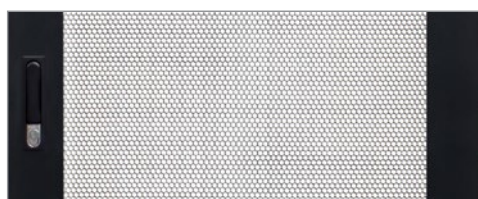

Mesh Door

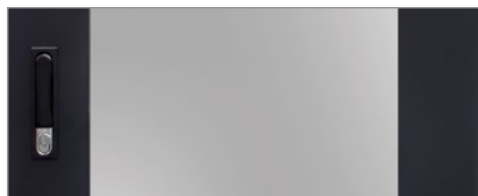

Glass Door



Perspex Door



Metal Door





WALL MOUNT SERVER RACKS



HIGHLIGHTS

- Designed for limited space environment where equipment needs to be secure and out of the way
- Available in various sizes from 4RU to 18RU with adjustable front vertical rackmount rails
- Includes lockable front door
- Removable rear panel
- Fully assembled for quick installation
- Conform to standard ANSI/EIRA RS-310-D, IEC1297-2, DIN4191; PAT7, GB/T304M 2-92

RACK SIZES

Rack Part No.	Rack Height	Accessories Inside	Weight (kg)	Dimensions (mm) Width x Depth x Height	L Brackets Rail Set	Top and Bottom Cutouts	Loading Capacity	Features		
								Cable Access top and bottom	Split Side Panels	Glazed safety glass door 5mm
CBN-4RU-64WM	4RU	L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts, 1 X Fixed Shelf, 1 X 6 Way PDU	12	600 X 450 X 282	1	1	80	✓	✓	✓
CBN-6RU-64WM	6RU		14	600 X 450 X 370	1	1	80	✓	✓	✓
CBN-9RU-64WM	9RU		20	600 X 450 X 504	2	1	80	✓	✓	✓
CBN-9RU-66SWM	9 RU		24	600 X 600 X 504	2	1	80	✓	✓	✓
CBN-12RU-64WM	12RU		24	600 X 450 X 637	2	1	80	✓	✓	✓
CBN-12RU-66SWM	12RU		28	600 X 600 X 637	2	1	80	✓	✓	✓
CBN-15RU-66SWM	15RU		32	600 X 600 X 770	2	1	80	✓	✓	✓
CBN-18RU-64WM	18RU	L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts, 2 X Fixed Shelf, 1 X 8 Way PDU	33,5	600 X 450 X 903,4	3	1	80	✓	✓	✓



WALL MOUNT SWING FRAME SERVER RACKS



HIGHLIGHTS

- Adjustable front and rear vertical rackmount rails
- Hinged cabinet swings away from wall bracket for easy
- Includes lockable front door
- Removable rear panel
- Fully assembled for quick installation
- Conform to standard ANSI/EIRA RS-310-D, EIA-310-E, DIN41491, DIN 41494, IEC 60297-3-100, IP20 Protection Rating, RoHS

RACK SIZES

Rack Part No.	Rack Height	Accessories Inside	Weight (kg)	Dimensions (mm) Width x Depth x Height	L Brackets Rail Set	Top and Bottom Cutouts	Loading Capacity	Features		
								Cable Access top and bottom	Split Side Panels	Glazed safety glass door 5mm
CBN-4RU-66WM	4RU	L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts	16,5	600 X 550 X 282	1	1	80	✓	✓	✓
CBN-6RU-66WM	6RU		19,5	600 X 550 X 370	1	1	80	✓	✓	✓
CBN-9RU-66WM	9 RU	L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts, 1 X Fixed Shelf, 1 X 6 Way PDU	27	600 X 550 X 504	2	1	80	✓	✓	✓
CBN-12RU-66WM	12RU		30	600 X 550 X 637	2	1	80	✓	✓	✓
CBN-18RU-66WM	18RU	L-shaped rails, 20 x M6 Cage Nuts, 20 x M6 Washers, 20 x M6 Bolts, 2 X Fixed Shelf, 1 X 8 Way PDU	38	600 X 550 X 903,4	3	1	80	✓	✓	✓



SLIDE OUT RACK



Slide & Extend



Turn Radius up to 90°

SERVEREDGE SLIDE & SWIVEL RACKS

Part No.: CBN-10RU-SSR | CBN-12RU-SSR | CBN-15RU-SSR | CBN-42RU-SSR

The Serveredge 19 Inch Slide Out Rack comes with a folding cable management bar which can be fitted to the rear and extends as the rack is pulled out - eliminating cable tension.

The base plate is designed to be securely bolted or screwed to a flat, solid surface to ensure maximum stability.

The Serveredge 19 Inch Slide Out Rack consists of a top unit, a rotating base unit and a folding cable management bar.

HIGHLIGHTS

- Supports a static loading capacity of 60kg
- Locks in the extended position for simplified equipment integration
- Rear cable support bars for effective cable management
- Rotating locking mechanism can be locked at 0°, 60° and 90° for easy installation and servicing
- Pre-drilled holes to secure the rack directly to the floor
- Easy to assemble
- Flat-packed for easy shipping
- Warranty: 25 Years* See T&Cs

Available in: 10RU, 12RU, 15RU & 42RU



Basic Office Racks
DB Series



DB Series Front

Elementary Soundproof
Office Racks DR Series



DR Series Front

Premium Soundproof
Office Racks DX Series



DX Series Front



DB Series Back

Comes in 3 different colours



DR Series Back



DX Series Back

HIGHLIGHTS


- Blend discretely into any office due to it's furniture-like appearance, creating an anonymous, secure environment for your IT
- Durable worktop which cab be utilised for other office equipments, such as a printed or fax machine.
- Designed to blend in with ventilation, soundproofing and a basic power strip
- Can be stowed under a desk
- Warranty: 25 Years* See T&Cs



BASIC OFFICE RACKS



Removable Back



Castor & Levelling Feet



Fan Cut-outs & Cable Guides

BASIC OFFICE RACK DB SERIES

The basic office rack enclosure is the perfect solution for someone who doesn't have the time, budget nor space to build a dedicated IT zone. Presenting a discrete, furniture-like appearance, it is designed to blend into non-IT spaces such as the Home Office, School, AV room, Small Office and Remote Office environments. It is portable, secure, and can be used as a durable worktop that can be utilised for office equipment such as printers or fax machines



Beech



Light Grey



Walnut

HIGHLIGHTS


- Cost-effective furniture rack includes advanced features for reliability
- MDF construction with Metal internal fittings
- Weight capacity of 150Kg
- Comes in a flat-pack
- Cable routing glands from both top and bottom
- Dual fan cutouts
- Confirm to Standard ANSI/EIA RS-310-D, IEC297-2, DIN4191; PART1, DIN4194; PAT7, GB/T3047M 2-92
- Warranty: 3 Years* See T&Cs

SPECIFICATIONS

Product Code	DB-12RU-56FS-BH / DB-12RU-56FS-LG DB-12RU-56FS-WL	DB-18RU-56FS-BH / DB-18RU-56FS-LG DB-18RU-56FS-WL
Rack Height (1U=44.45mm)	12RU	18RU
External Cabinet Dimensions (WDH/mm, Includes Casters)	560 X 660 X 664	560 X 660 X 931
Max. Rackmount Unit Depth (mm)	560	560 mm
Assembled Weight without Rackmount Equipment (kg)	30.2	40.1
Max. Weight Capacity (kg)	150	150
Casters	4	4
Cabinet Colour	Beech, Light Grey, Walnut	Beech, Light Grey, Walnut
Flat Pack Shipping Dimensions	748 X 748 X 145	748 X 1015 X 145



ELEMENTARY SOUNDPROOF OFFICE RACKS



Passive noise reduction



Castors with lock



Extended door hinge

ELEMENTARY SOUNDPROOF OFFICE RACK DB SERIES

Serveredge basic soundproof office rack enclosure is the perfect solution for someone who doesn't have the time, budget nor space to build a dedicated IT zone. Presenting a discrete, furniture-like appearance, it is designed to blend into non-IT spaces such as the Home Office, School, AV room, Small Office and Remote Office environments. It is soundproofed with sound attenuation of up to 16 dB(A) to be an even more discrete solution. It is portable, secure, and can be used as a durable worktop that can be utilised for office equipment such as printers or fax machines.

HIGHLIGHTS

- Cost-effective furniture rack includes advanced features for reliability
- MDF construction with Metal internal fittings
- Weight capacity of 150Kg
- Comes in a flat-pack
- Cable routing glands from both top and bottom
- Soundproofing with sound attenuation of up to 16dB(A)
- 2 ultra-quiet rear fan panel
- Confirm to Standard ANSI/EIA RS-310-D, IEC297-2, DIN4191; PART1, DIN4194; PAT7, GB/T3047M 2-92
- Warranty: 3 Years* See T&Cs

SPECIFICATIONS

Product Code	DR-12RU-67FS
Rack Height (1U=44.45mm)	12RU
External Cabinet Dimensions (WDH/mm, Includes Casters)	705 X 782 X 726
Max. Rackmount Unit Depth (mm)	682
Assembled Weight without Rackmount Equipment (kg)	59.68
Max. Weight Capacity (kg)	250
Casters	4
Cabinet Colour	Beech
Flat Pack Shipping Dimensions	820 X 900 X 850
Noise Attenuation	16dB(A)



PREMIUM SOUNDPROOF OFFICE RACKS



Built in Fan Kit



Castors with Leveling Feet



Cable Management

PREMIUM SOUNDPROOF OFFICE RACK DB SERIES

Serveredge premium soundproof office rack enclosure is the perfect solution for someone who doesn't have the time, budget nor space to build a dedicated IT zone. Presenting a discrete, furniture-like appearance, it is designed to blend into non-IT spaces such as the Home Office, School, AV room, Small Office and Remote Office environments. It is soundproofed with sound attenuation of up to 16 dB(A) to be an even more discrete solution. It is portable, secure, and can be used as a durable worktop that can be utilised for office equipment such as printers or fax machines.

HIGHLIGHTS

- Cost-effective furniture rack includes advanced features for reliability
- MDF construction with Metal internal fittings
- Weight capacity of 150Kg
- Comes in a flat-pack
- Cable routing glands from both top and bottom
- Soundproofing with sound attenuation of up to 15dB(A)
- 3 ultra-quiet rear fan panel
- Confirm to Standard ANSI/EIA RS-310-D, IEC297-2, DIN4191; PART1, DIN4194; PAT7, GB/T3047M 2-92
- Warranty: 3 Years* See T&Cs

SPECIFICATIONS

Product Code	DX-12RU-71FS	DX-24RU-71FS	DX-42RU-71FS
Rack Height (1U=44.45mm)	12RU	24RU	42RU
External Cabinet Dimensions (WDH/mm, Includes Casters)	750 X 1135 X 704	750 X 1135 X 1240	750 X 1135 X 2060
Max. Rackmount Unit Depth (mm)	1035.0	1035.0	1035.0
Assembled Weight without Rackmount Equipment (kg)	84	148.6	231.8
Max. Weight Capacity (kg)	500	800	800
Casters	4	4	4
Cabinet Colour	Beech	Beech	Beech
Flat Pack Shipping Dimensions	1240 X 800 X 840	1240 X 800 X 1410	1240 X 800 X 2223
Noise Attenuation	15dB(A)	15dB(A)	15dB(A)
Ultra-quiet Fan rear panel	1	2	3



LOCKABLE RACK MOUNTABLE
DRAWER

Part No.: SLV-XX-RD



FEATURES

- Comes with lock with set of keys to keep your equipment safe
- Solid steel construction
- Warranty: 25 Years* See T&Cs

Available in: 1RU or 2RU

SLIDING SHELF

Part No.: SLV-01-600 | SLV-01-SLFB68 | SLV-01-SLFB81



FEATURES

- Ball bearing slide for greater control of heavy loads
- 471mm wide x 450mm deep
- 25kg distributed load
- Fully vented
- Warranty: 25 Years* See T&Cs

SERVER CABINET SHELVES

Part No.: SLV-012P-XXX | SLV-02-XXX



FEATURES

- Fully compatible with all 19 inch server cabinets
- Comes included with mounting cage nut and bolts
- Warranty: 25 Years* See T&Cs

Available Depth: 150mm, 250mm, 350mm, & 450mm



4 POST MULTI-FUNCTION OPEN RACKS



RU Markings



Extendable Depth



Castors & Leveling Feet



Vertical Cable Management

SERVEREDGE 4 POST ADJUSTABLE SERVER RACK WITH CASTORS

The Serveredge CBN-4P-XXRU Open Frame 4 Post Server Rack is a perfect solution for securely storing your standard rack mount equipment in a sturdy, adjustable depth open-frame rack.

With features such as easy-to-read markings for both rack units (RU) and depth and a wide range of mounting depth adjustments (632-988mm), this server rack is designed with ease of use in mind, making it easy to adapt the rack to fit your equipment.

It has a static loading capacity of up to 545kg. It is also compliant with industry rack standards (EIA/ECA-310, IEC 60297, DIN 41494), signifying its compatibility with most rack equipment.

HIGHLIGHTS


- Adjustable mounting depth from 632-988
- Supports a static loading capacity of 545kg
- Easy-to-read rack Unit (U) and depth adjustment markings
- Casters, leveling feet and cable management hooks included
- Pre-drilled holes to secure the rack directly to the floor
- Easy to assemble
- Confirm to Standard DIN 41494, EIA/ECA-310-E, IEC 60297-3-100
- Flat-packed for easy shipping
- Warranty: 25 Years* See T&Cs

SPECIFICATIONS

Product Code :	CBN-4P-12RU	CBN-4P-18RU	CBN-4P-22RJC	BN-4P-42RU	CBN-4P-45RU
Castors:	Yes	Yes	Yes	Yes	Yes
Frame Type:	Open Frame	Open Frame	Open Frame	Open Frame	Open Frame
Rack Type :	4-Post	4-Post	4-Post	4-Post	4-Post
RU Height :	22RU	42RU	22RU	42RU	45RU
Weight Capacity :	545kg	545kg	545kg	545kg	545kg
Color:	Black	Black	Black	Black	Black
Enclosure Type :	Steel	Steel	Steel	Steel	Steel
Dimensions (H x W x D) :	710mm x 523mm x 632-988mm	987mm x 523mm x 632-988mm	1156mm x 523mm x 632-988mm	2045mm x 523mm x 632-988mm	2180mm x 523mm x 632-988mm
Internal Height :	644 mm	921 mm	990 mm	1879 mm	2014 mm
Internal Width :	465 mm	465 mm	465 mm	465 mm	465 mm
Maximum Depth:	988 mm	988 mm	988 mm	988 mm	988 mm
Minimum Depth:	632 mm	632 mm	632 mm	632 mm	632 mm
Flat Pack:	Yes	Yes	Yes	Yes	Yes
Shipping (Package) Weight :	24 kg	29 kg	31.6 kg	41 kg	46 kg
Product Weight :	21 kg	26 kg	29.6 kg	38.5 kg	42.5 kg



4 POST MULTI-FUNCTION OPEN RACKS

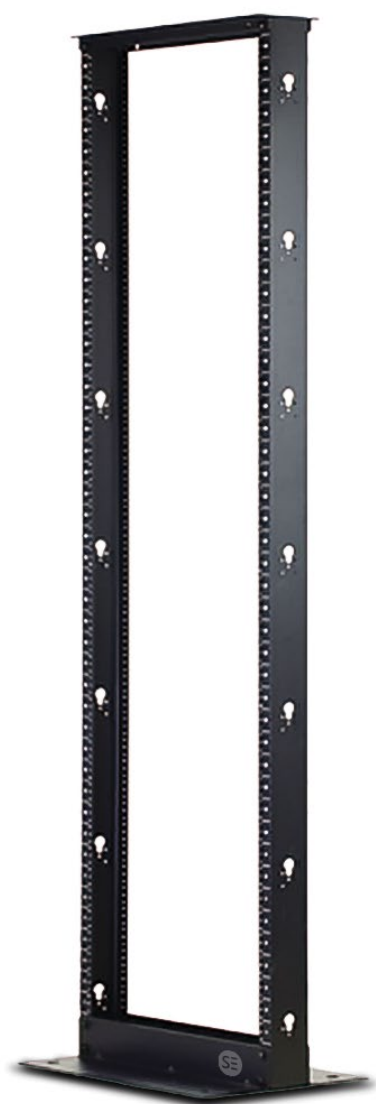

SERVEREDGE OPEN FRAME 2 POST RACK

The Serveredge Open Frame 2 Post Server Rack is a perfect solution for securely storing your standard rack mount equipment in a tight floor spaces. These racks provide unrestricted airflow for maximum ventilation & easy access for cable management.

This Serveredge rack comes unassembled in a compact carton & is easy to assemble. Assembly approximately takes 10 minutes. These racks have pre punched holes in the base plate making it easy to attach the rack to the floor.

It has a static loading capacity of up to 600kg. It is also compliant with industry rack standards (EIA/ECA-310, IEC 60297, DIN 41494), signifying its compatibility with most rack equipment.

HIGHLIGHTS

- Pre-drilled holes to secure the rack directly to the floor
- Easy to assemble
- Confirm to Standard DIN 41494, EIA/ECA-310-E, IEC 60297-3-100
- Flat-packed for easy shipping
- Warranty: 25 Years* See T&Cs



Vertical Cable Management

SPECIFICATIONS

Product Code :	CBN-2P-42RJC	BN-2P-45RU
Casters:	Yes	Yes
Frame Type :	Open Frame	Open Frame
Rack Type :	2-Post	2-Post
U Height :	42RU	45RU
Weight Capacity :	300kg	300kg
Color:	Black	Black
Enclosure Type :	Steel	Steel
Dimensions (H x W x D) :	2006mm x 599mm x 602mm	2141mm x 599mm x 602mm
Internal Width :	464.8 mm	464.8 mm
Flat Pack:	Yes	Yes
Shipping (Package) Weight	40 kg	45 kg
Product Weight :	37.5 kg	41.5 kg



MANAGED POWER DISTRIBUTION UNITS

SMART SWITCHED PDU's

The Serveredge switched PDU enables the user to control and monitor the power remotely. The web based interface allows the user switch on/off functionality for power cycling a connected equipment remotely on each individual ports. A true digital RMS meter allows real time current monitoring of the connected equipments with data logging and reporting. It allows for a user defined alarm threshold for overloads and warnings.



Available in: 1, 2, 8, 16 & 24 Ports

Compatible with: Extron, AMX & Crestron Switchers

Compatible with: 10 Amp, 15 Amp & 32 Amp



FEATURES

- Remote power management (Power cycling/ Monitoring) of the connected equipments
- Full-featured network management interface via Http, Https, SNMP, DHCP, UDP protocols
- Allows user with Individual outlet control for remote switch on/off (power cycling)
- Capable of Total Remote Power Monitoring by Meter, Web, SNMP, Free Bundle Software via the * True RMS current meter
- Supports user defined alarm threshold for overloads and warning and raise warning by sending emails and trap information in case of threshold breach.
- Email, Trap, Audible Alarm can be set up by user as alarms

HIGHLIGHTS

- Designed for limited space environment where equipment needs to be secured and out of the way
- Available in 10A, 15A & 32A with various port combinations of IEC C13 & IEC C19 Output
- The Web based interface provides the user with on/off functionality for power cycling a connected equipment remotely
- A true digital RMS meter allows real time current monitoring of the connected equipments with data logging and reporting
- Feature a user defined alarm threshold for overloads and warnings
- Warranty: 2 Years* See T&Cs

SPECIFICATIONS

PDU Part No.	Ports	OutputsR	Input	UC	urrent	Voltage
SEDG-1PSW-10A	1	1 X IEC C13	1 X IEC C14	1	10A	240V
SEDG-2PSW-10A	2	2 X IEC C13	1 X IEC C14	1	10A	240V
SEDG-8PSW-C13	8	8 X IEC C13	1 X IEC C14	1	10A	240V
SEDG-8PSW-C13-16A	8	8 X IEC C13	1 X IEC C20	1	16A	240V
SEDG-8PSW-PP-C13	8	8 X IEC C13	1 X IEC C14	1	16A	240V
SEDG-8PSW-PP-16A	8	8 X IEC C13	1 X IEC C14	1	16A	240V
SEDG-16PSW-C13C16-16A	16	14 X IEC C13 2 X IEC C19	1 X IEC C20	1	16A	240V
SEDG-24PSW-C13C16-16A	24	21 X IEC C13 3 X IEC C19	1 X IEC C20	1	16A	240V
SEDG-24PSW-C13C16-32A	24	21 X IEC C13 3 X IEC C19	1 X IP56 3 Pin Round Captive Input Plug	1	32A	240V



MANAGED POWER DISTRIBUTION UNITS

IEC TYPE

The Serveredge basic PDUs are the most efficient way to power protect your rack mount equipments. Serveredge PDUs are built to both Australian & International standards and requirements, so that your equipment can deliver the most optimum performance while using minimum of your valuable rack space. The PDUs have a Metal Alloy casing which makes them durable for rack mount use and also allows both vertical and horizontal installations. All the PDUs have surge protection as a standard feature.



- Vertical or Horizontal mount
- Available Depth: 6 to 20 Ports

AUSTRALIAN GPO TYPE

The Serveredge basic PDUs are the most efficient way to power protect your rack mount equipments. Serveredge PDUs are built to both Australian & International standards and requirements, so that your equipment can deliver the most optimum performance while using minimum of your valuable rack space. The PDUs have a Metal Alloy casing which makes them durable for rack mount use and also allows both vertical and horizontal installations. All the PDUs have surge protection as a standard feature.



- Vertical or Horizontal mount
- Available Depth: 6 to 20 Ports

HORIZONTAL BASIC PDUS

The Serveredge basic PDU is the most efficient way to power protect your rack mount equipment. Serveredge PDUs are built to both Australian & International standards and requirements, so that your equipment can deliver the most optimum performance while using minimum of your valuable rack space. The PDUs have a Metal Alloy casing which makes them durable for rack mount use and also allows both vertical and horizontal installations (Depending on the model). Serveredge PDUs are equipped with overload and surge protection as (Feature may vary depending on the model).



FEATURES

- Wide range of output ports
- Single input power source
- Warranty: 25 Years Manufacturers * See T&Cs (Warranty: To repair or replace, covers manufacturing faults & defects)

- Horizontal mount

SPECIFICATIONS

PDU Part No.	Ports	OutputsR	Input	U	CurrentV	oltage	Surge Protection
SEDG-6P-GPO	6	6 X 3 Pin AUS GPO	1 X 3 Pln AUS GPO	1	10A	240V	
SEDG-8P-GPO	8	8 X 3 Pin AUS GPO	1 X 3 Pln AUS GPO	1	10A	240V	
SEDG-8PB-C13	8	8 X IEC C13	1 X IEC C14	1	10A	240V	
SEDG-8PB-3PC13	8	8 X IEC C13	1 X 3 Pln AUS GPO	1	10A	240V	
SEDG-8PB-C13-16A	8	8 X IEC C13	1 X 3 Pln AUS GPO	1	16A	240V	
SEDG-8P-GPO-SP	8	8 X 3 Pin AUS GPO	1 X 3 Pln AUS GPO	1	10A	240V	✓
SEDG-11P-C13GPO-10A	11	7 X 3 Pin AUS GPO 4 X IEC C13	1 X 3 Pln AUS GPO	1	10A	240V	✓
SEDG-12P-GPO	12	12 X 3 Pin AUS GPO	1 X 3 Pln AUS GPO	2	10A	240V	
SEDG-12PV-GPO	12	12 X 3 Pin AUS GPO	1 X 3 Pln AUS GPO	1	10A	240V	
SEDG-20P-GPO	20	20 X 3 in AUS GPO	1 X 3 Pln AUS GPO	1	10A	240V	



BASIC POWER DISTRIBUTION UNITS

VERTICAL BASIC PDUS

The Serveredge basic vertical PDU is the most efficient way to power protect your rack mount equipment. Serveredge PDUs are built to both Australian & International standards and requirements, so that your equipment can deliver the most optimum performance while using minimum of your valuable rack space. The PDUs have a Metal Alloy casing which makes them durable for rack mount use and also allows both vertical and horizontal installations (Depending on the model).

FEATURES

- Wide range of output ports
- Single input power source
- Includes universal mounting brackets
- Warranty: 25 Years Manufacturers* See T&Cs
(Warranty: To repair or replace, covers manufacturing faults & defects)

Vertical mount



SPECIFICATIONS

PDU Part No.	Ports	OutputsC	Input	urrent	Voltage
SEDG-12PV-GPO	12	12 X 3 Pin AUS GPO	1 X 3 Pin AUS GPO	10A	240V
SEDG-12-C13C19-16A	12	10 X IEC C13 2 X C19	1 X IEC C20	16A	240V
SEDG-15PB-C13	15	15 X IEC C13	1 X IEC C14	10A	240V
SEDG-15PB-C13-16A	15	15 X IEC C13	1 X IEC C20	16A	240V
SEDG-20P-GPO	20	20 X 3 Pin AUS GPO	1 X 3 Pin AUS GPO	10A	240V
SEDG-24PV-C13C19-16A	24	20 X IEC C13 4 X C19	1 X IEC C20	16A	240V



www.serveredge.com

© Serveredge. All rights reserved.

Reproduction in whole or in part without permission is prohibited. All other trademarks are the properties of their owners.

Tested to Comply with FCC and CE Standards. HOME OR OFFICE USE.